


PRO-GHX

INDUSTRIAL EXPLOSION-PROOF WORM GEAR JACKSHAFT WITH EMERGENCY CHAIN HOIST
Designed for use on all rolling doors and grilles and large sectional doors with high or vertical lift track

STANDARD FEATURES

- 2 year Warranty
- Hazardous location modification rated for Division I/Class I/Group D, Division I/Class II/ Groups F & G; Division I/Class I/Group C available upon request
- All components CSA and UL listed
- Modification includes explosion-proof motor, explosion-proof fittings, operator mounted explosion-proof electrical control enclosure and an explosion-proof three-button station
- 24V class 2 control circuit with 50VA transformer to protect against short circuit
- Low friction powder metal limit cam nuts with fully adjustable rotary type limit switch assembly
- Continuous duty industrial explosion-proof motor with reset overload protection (1-phase) or thermal overload relay motor protection (3-phase)
- Motor removable without affecting limit settings
- Heavy duty worm gear reduction in oil bath gearbox
- 1.5 second time delay on all open functions standard on 1.5, 2, 3 & 5 HP
- Solenoid brake standard
- #50 roller chain and sprockets on final drive, except 3 HP or larger
- Emergency chain hoist with electrical cut-out switch for manual operation
- Chain keeper
- Universal left or right hand mounting
- Baked on dark grey coat finish
- Shipping weight 145 lbs

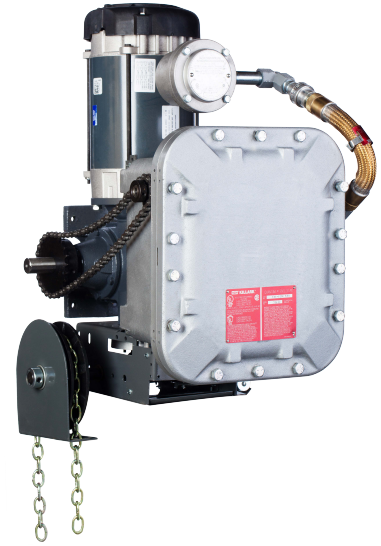

When ordering a PRO-GHX operator, supply Nice with the following information:

- Installation environment
- Door height
- Door width
- Type of door
- Horsepower
- Voltage/ Phase
- Safety devices
- Door shaft diameter & door shaft key size
- Mounting (LH or RH, Bracket or Wall mount)
- Control circuit options

