


Max 3 Modem Module

OVERVIEW:

The Max 3 Modem Module enables dial-up remote site management of the Max 3 and MiniMax 3 access control systems over standard telephone lines. The Max 3 modem is designed for easy plug-on “stackable” mounting to the first Max 3 module in a system. Power and communications are established with the included wire harnesses that connect easily between the Max 3 Modem and the Max 3 module. A 6 foot phone cord and RJ11 module phone jack are included with the Max 3 modem.

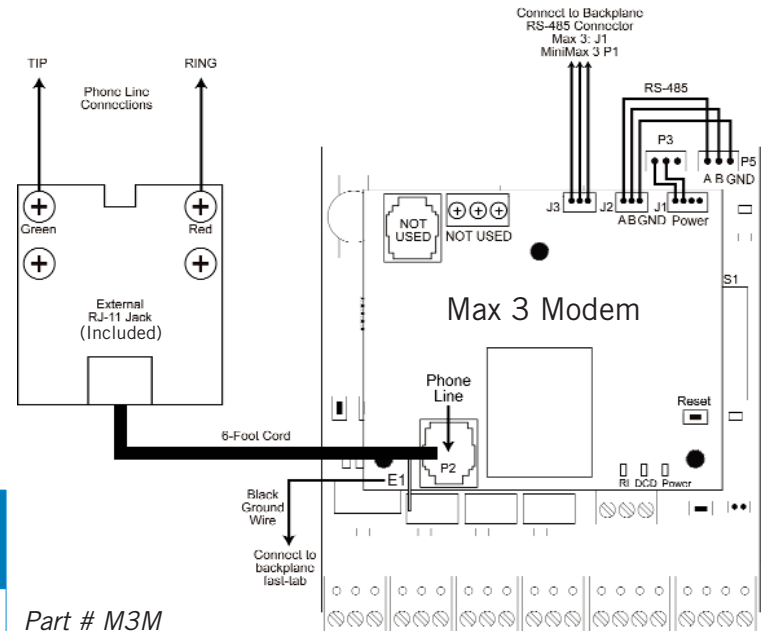

SPECIFICATIONS:

- Mechanical
 - 2.90" W x 3.45" L x 0.81" D
- Environmental
 - Indoor only
 - Temperature tolerance 32F to 100F (0 to 49C)
- Software compatibility:
 - Hub Manager Professional version 7.4 (or higher)
- Electrical
 - Operating voltage: 12 VDC
 - Current draw: 75mA
- Communication Speed
 - Baud rate: 19200kbps

PRODUCT HIGHLIGHTS:

- Convenient “stackable” mounting to Max 3 module
- Securely installs in Max 3 and MiniMax 3 cabinet
- Supports a wide variety of PC side modems
- Primary and back up power from Max 3 or MiniMax 3 system

ORDERING INFORMATION:

Marketing #	Description
M3M	IEI Max3 Modem Module for dial up remote site management applications. Easy plug-on installation to Max 3 Module in Max 3 and MiniMax 3 systems. Systems requirements: Software must be Hub Manager Professional v7.4 or higher. Packaging includes software, power and RS-485 harnesses, stand-offs, phone jack, and phone cord.